

Waterwheel Manual XL with wheels, all-in & Waterwheel Manual XL with wheels, empty

Original instructions: Models, All-in 1062256/ Empty 1062257

Fiskars Finland Oy Ab
Keilaniementie 10, P.O. Box 91
FI-02151 Espoo, Finland
Tel. +358 (0)204 3910

Fiskars brand is a registered trademark of Fiskars Corporation.

For packaging recycling information: fiskars.com/pack



ATTENTION:
PLEASE READ THE MANUAL BEFORE USING
PLEASE INCLUDE ALL DOCUMENTS WHEN HANDLING OVER THE PRODUCT TO OTHERS

Horizontal placement and 360° rotation lock pedal for easier reel in

- Ready-to-use set · Up to 50 meters hose capacity
- **Handle with SoftGrip** for easy transport around the garden/lawn.
- **Telescopic handle** for better ergonomics with intuitive locking mechanism
- Universal fit. Fits with other brands · High pressure tested · UV resistant
- **Ground installed soft pads** for extra gripping ground or patio
- **Large foldable handle** for easy manual reeling in hose
- **Oscillator** for even hose allocation within the waterwheel compatible with hoses 13–19 mm (1/2"–3/4")

Waterwheel Manual XL with wheels, all-in (1062256) instructions for use:

1. Take the tap connector and choose the right thread size. The included tap connector has 3 thread sizes. Install the tap connector on the outdoor tap.
2. Connect the inlet hose to the tap and connect it to the reel. Connect nozzle to the outlet hose.
3. For stability and 360° function, place the reel horizontally. Pull the outlet hose to the desired length.
4. Rotate nozzle head to start watering.
5. Before retracting the outlet hose, close the water source from the tap. Retract the hose manually by rotating the foldable handle.

Tips: If you wish to lock the reel in a certain direction, place the reel in a horizontal position and press the 360° function lock pedal to the ground to lock the reel. To unlock the direction, press the pedal again. For additional stability, use the ground spike to anchor the reel to the ground.

If needed, you can replace both the inlet and outlet hose. The Waterwheel XL features a maximum outlet hose capacity of 19mm (3/4") - 30m, 15mm (5/8") - 40m and 13mm (1/2") - 50m. The inlet hose can be chosen freely.

Waterwheel Manual XL with wheels, empty (1062257) instructions for use:

The Waterwheel XL features a maximum outlet hose capacity of 19mm (3/4") - 30m, 15mm (5/8") - 40m and 13mm (1/2") - 50m. The inlet hose can be chosen freely.

- A. Equip yourself with hoses, hose connectors, a nozzle and a tap connector of your choice.
- B. Install the hose connectors to the outlet hose and connect the hose to the reel. Repeat the same with the inlet hose.
- C. Uncoil the hose to avoid possible kinks and twists. Retract the hose by manually rotating the foldable handle.

1. Take the tap connector and choose the right thread size. The included tap connector has 3 thread sizes. Install the tap connector to the outdoor tap.
2. Connect the inlet hose to the tap and connect it to the reel. Connect nozzle to the outlet hose.
3. For stability and 360° function, place the reel horizontally. Pull the outlet hose into the desired length.
4. Activate water flow on nozzle to start watering.
5. Before retracting the outlet hose, close the water source from the tap. Retract the hose manually by rotating the foldable handle.

Tips: If you wish to lock the reel in a certain direction, place the reel in a horizontal position and press the 360° function lock pedal to the ground to lock the reel. To unlock the direction, press the pedal again. For additional stability, use the ground spike to anchor the reel to the ground.

Maintenance:

- When not in use, please turn off the water source and release the water pressure by turning on the nozzle for a few seconds.
- Rinse dirt and debris with water.
- Use the product only for water transfer.

PLEASE READ ALL SAFETY ADVICE AND INSTRUCTIONS BEFORE USING THE PRODUCT

Warning: Risk of injury due to fingers jamming. Watch your fingers when retracting hose. · Always close the water source (water tap) after use of garden watering products. · Do not direct the water jet towards electrical equipment! · Do not direct the water jet towards persons or animals! · No drinking water.

Warranty terms: The manufacturer shall repair or replace, through the dealer, any parts of the product found to be faulty due to manufacturing defects, for a period of 24 months as of the date of purchase. The warranty does not cover defects due to tampering, improper use or wear. The warranty is valid only if the customer returns the product to the dealer complete in all its parts together with the receipt or other document proving the date of purchase.

STORE IN A FROST-FREE ENVIRONMENT

UK Fiskars UK Limited, Wedgwood Drive, Barlaston, Stoke-on-Trent, Staffordshire, ST12 9EF, ukconsumer@fiskars.com
 AU Fiskars Australia Pty Ltd, australia.orders@fiskars.com, +61 1300 852 022 kuluttajapalvelu.suomi@fiskars.com +46 42 36 11 00
 DE +47 23 00 64 40 de+4538144848_customer@fiskars.com de+33169751515_service@fiskars.com
 DK +34 91 767 65 81 dk+34917676581_service@fiskars.com nl+498000051810_consumer@fiskars.com
 NL +34 91 767 65 81 nl+34917676581_consumer@fiskars.com nl+498000051810_consumer@fiskars.com
 IT Fiskars Italy s.r.l., c/o Copernico Centrale, via Copernico 38, 20125 Milano. www.fiskars.it/supporto/assistenza-clienti. Raccolta differenziata. Verifica le disposizioni del tuo comune. fiskars.com/pack
 PL Fiskars Polska Sp. z o.o., ul. Komitetu Obrony Robotników 45B, 02-146 Warszawa. +48 22 310 85 00 pl+48223108500_fiskars@fiskars.com
 HU Fiskars Magyarország Kft., Magyarországi Fióktelepe, 1119 Budapest Fehérvári út 97-99, +36 1 453 0945
 ES +372 60 17 010 es+3726017010_fiskars@fiskars.com es+3582043910_fiskars@fiskars.com es+3582043910_office@fiskars.com

Waterwheel Manual XL with wheels


All-in 1062256 / Empty 1062257

- A. Inlet
- B. Outlet
- C. Telescopic handle with SoftGrip
- D. Locking latch for telescopic handles
- E. 360° function lock pedal
- F. Foldable handle for reeling
- G. Oscillator
- H. Ground anchor
- I. Wheels



Parts (Included in 1062256)

- Tap Connector, Multi
- 2 x Solid Quick Hose Connector 13–15 mm (1/2-5/8"), Flow
- 1 x Solid Quick Hose Connector 13–15 mm (1/2-5/8"), Stop
- CF Hose Nozzle
- Outlet Hose 20m and Inlet Hose 1.5m Hose 13mm (1/2") Q3

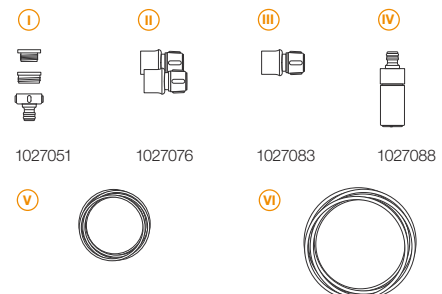

Use

